

## LED UV PRINTERS





**MUTOH**  
 **HYBRID**  
TECHNOLOGY



**24CM**

**MUTOH**  
 **FLATBED**  
TECHNOLOGY

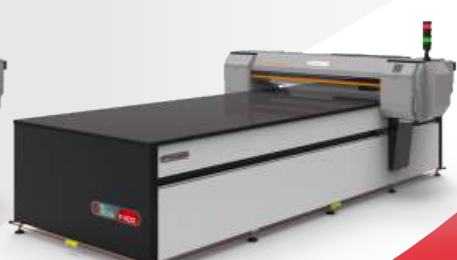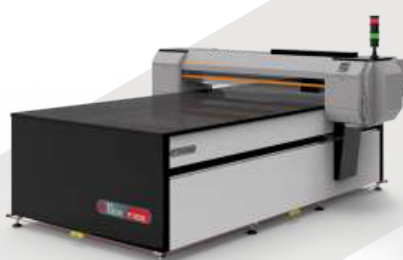



 **HYBRID**  
TECHNOLOGY

|                     |                                                       |
|---------------------|-------------------------------------------------------|
| Printing technology | ink-jet double head 16 channels 8 colors              |
| Resolution          | 540, 720, 1440 dpi max                                |
| Drop size           | Variable, minimum 4 pl                                |
| Max printing size   | Max 1625 mm x infinity                                |
| Printing thickness  | Max 240 mm                                            |
| Height detection    | Laser sensor                                          |
| Ink type            | Ultra Grip®, Ultra Latex®, UltraTex®,<br>Ultra UvLed® |
| Colors              | 2 cmyk, cmyk lc lm ww, cmyk ww vv                     |
| Interface           | Ethernet                                              |
| Software            | SmartRip®                                             |
| Accessories         | anti-static bar                                       |
| Price               | On request                                            |

**Other data:**


External pump case: **optional**  
Number of vacuum system areas: **1**  
380 volt power supply: **Power socket 400V,4p+t, 16A.**  
**The line must be protected by a 16A differential magnetotherm with sensitivity 0,3...40A 4 pol**  
Power supply 220V: **optional**  
Electrostatic bar: **optional**  
Dedicated external control tower (dim. 120x50x50 CM): **yes**  
Flat partitioning: **optional**  
Installation: **excluded**



|                     |                                                    |
|---------------------|----------------------------------------------------|
| Printing technology | ink-jet double head 16 channels 8 colors           |
| Resolution          | 540, 720, 1440 dpi max                             |
| Drop size           | Variable, minimum 4 pl                             |
| Max printing size   | Max 1625 mm x 1500 mm                              |
| Printing thickness  | Max 240 mm                                         |
| Height detection    | Laser sensor                                       |
| Ink type            | Ultra Grip®, Ultra Latex®, UltraTex®, Ultra UvLed® |
| Colors              | 2 cmyk, cmyk lc lm ww, cmyk ww vv                  |
| Interface           | Ethernet                                           |
| Software            | SmartRip®                                          |
| Accessories         | anti-static bar                                    |
| Price               | On request                                         |

#### Other data:

External pump case: **optional**  
Number of vacuum system areas: **1**  
380 volt power supply: **Power socket 400V,4p+t, 16A.**  
**The line must be protected by a 16A differential magnetotherm with sensitivity 0,3...40A 4 pol**  
Power supply 220V: **optional**  
Electrostatic bar: **optional**  
Dedicated external control tower (dim. 120x50x50 CM): **yes**  
Flat partitioning: **optional**  
Installation: **excluded**

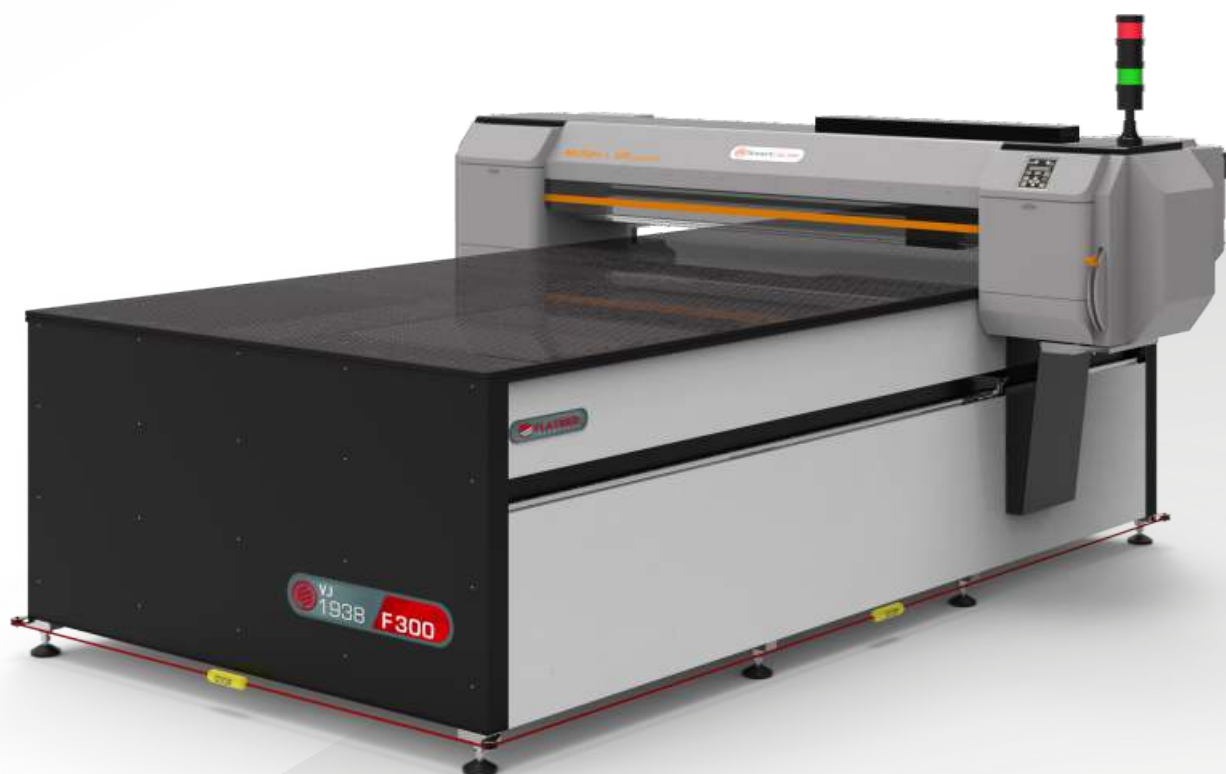

|                     |                                                    |
|---------------------|----------------------------------------------------|
| Printing technology | ink-jet double head 16 channels 8 colors           |
| Resolution          | 540, 720, 1440 dpi max                             |
| Drop size           | Variable, minimum 4 pl                             |
| Max printing size   | Max 1625 mm x 2500 mm                              |
| Printing thickness  | Max 240 mm                                         |
| Height detection    | Laser sensor                                       |
| Ink type            | Ultra Grip®, Ultra Latex®, UltraTex®, Ultra UvLed® |
| Colors              | 2 cmyk, cmyk lc lm ww, cmyk ww vv                  |
| Interface           | Ethernet                                           |
| Software            | SmartRip®                                          |
| Accessories         | anti-static bar                                    |
| Price               | On request                                         |

#### Other data:

External pump case: **optional**  
 Number of vacuum system areas: **1 - 2**  
 380 volt power supply: **Power socket 400V,4p+t, 16A.**  
**The line must be protected by a 16A differential magnetotherm with sensitivity 0,3...40A 4 pol**  
 Power supply 220V: **optional**  
 Electrostatic bar: **optional**  
 Dedicated external control tower (dim. 120x50x50 CM): **yes**  
 Flat partitioning: **optional**  
 Installation: **excluded**



|                     |                                                    |
|---------------------|----------------------------------------------------|
| Printing technology | ink-jet double head 16 channels 8 colors           |
| Resolution          | 540, 720, 1440 dpi max                             |
| Drop size           | Variable, minimum 4 pl                             |
| Max printing size   | Max 1625 mm x 3200 mm                              |
| Printing thickness  | Max 240 mm                                         |
| Height detection    | Laser sensor                                       |
| Ink type            | Ultra Grip®, Ultra Latex®, UltraTex®, Ultra UvLed® |
| Colors              | 2 cmyk, cmyk lc lm ww, cmyk ww vv                  |
| Interface           | Ethernet                                           |
| Software            | SmartRip®                                          |
| Accessories         | anti-static bar                                    |
| Price               | On request                                         |

#### Other data:

External pump case: **optional**  
 Number of vacuum system areas: **1 - 2 - 3**  
 380 volt power supply: **Power socket 400V,4p+t, 16A.**  
**The line must be protected by a 16A differential magnetotherm with sensitivity 0,3...40A 4 pol**  
 Power supply 220V: **optional**  
 Electrostatic bar: **optional**  
 Dedicated external control tower (dim. 120x50x50 CM): **yes**  
 Flat partitioning: **optional**  
 Installation: **excluded**

ENGINEERED ON  
**MUTOH**

